



Inductive Elements

Transzformátorok Transformatoren Transformers


Típus / Typ / Type: EE-42/20H-EMKxx

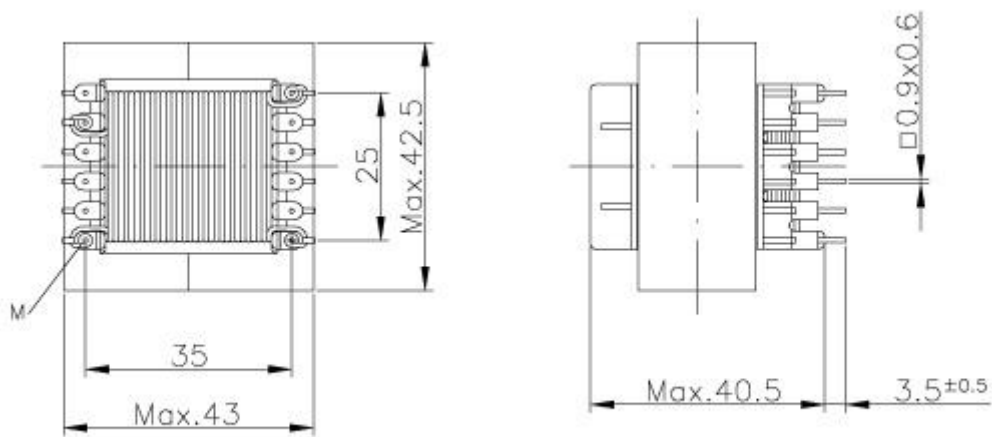

●: Tekercselés kezdete
Wicklungsanfang
Start of winding



Lábkiosztás /
Rasterplan /
Grid:

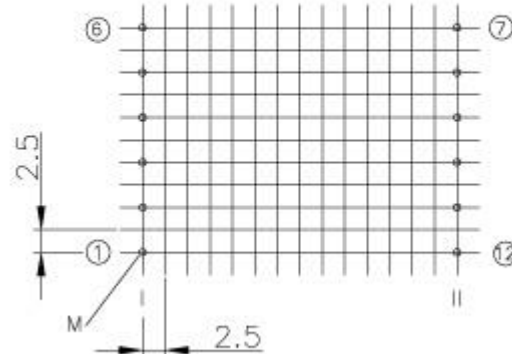

| Megrendelési szám / Bestellnummer / Order number [xx] | | | | | | | | | |
|---|---------------------------------|----------------------------|---------------|-------------------|-------------------------------|-------------------------------|-----------------------------------|----------------------------------|--|
| [- x] | Anyag / Werkstoff / Material | Al +30% -20% (nH) | $\mu\epsilon$ | Al min (nH) | Pv (mW / g) | | | | Súly / pár Gewicht / Satz Weight / pair (g) |
| | | | | | f=16 kHz B=200mT T=100C | f=25 kHz B=200mT T=100C | f=100 kHz B=100mT T=100C | f=300 kHz B=50mT T=100C | |
| 1 | M2TN-B | 4200 | 1500 | 3360 | ≤ 20 | ≤ 35 | - | - | 180 |
| 2 | M2TN-C | 4450 | 1600 | 3560 | - | ≤ 20 | ≤ 30 | - | 180 |
| 3 | M2TN-D | 4200 | 1500 | 3360 | - | - | ≤ 23 | ≤ 30 | 180 |

A tekercskivezetések igény szerinti kialakításban
Drosselabklemme werden nach Bedarf ausgestaltet
Chokeoutputs formed according to demands